



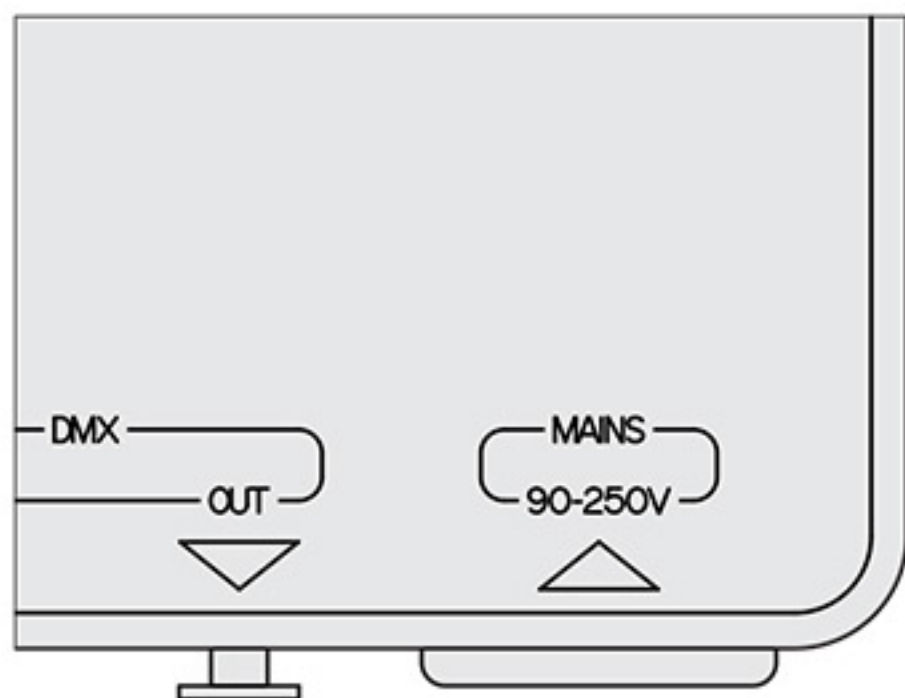

SHOWLED

CONBOX QUICK GUIDE

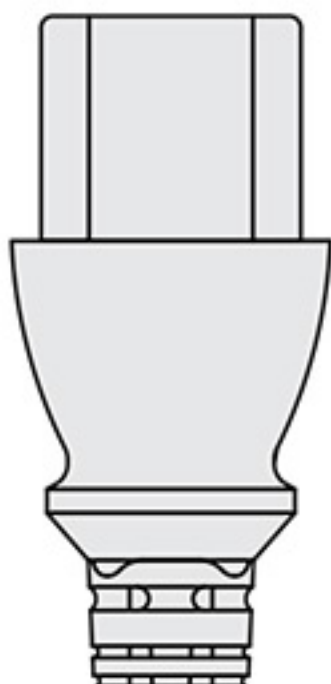

Distributed by

 **ROSE BRAND®**


NJ (800) 223 – 1624

CA (800) 360 – 5056


www.rosebrand.com



COMPONENTS



1. CONBOX
2. POWER CORD
3. DMX 10M
4. SPARE LEDS

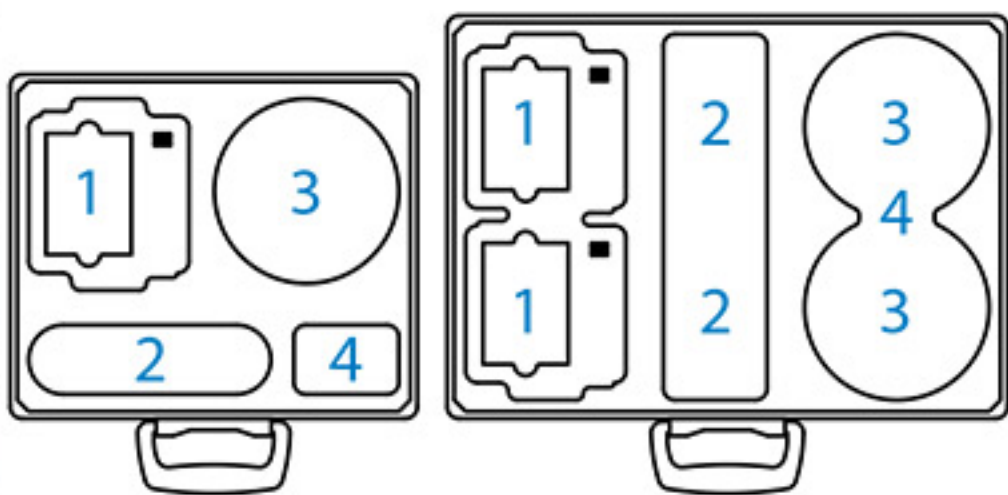


NO CONBOX
IN YOUR ?
STORAGE CASE!
CHECK YOUR
CURTAIN

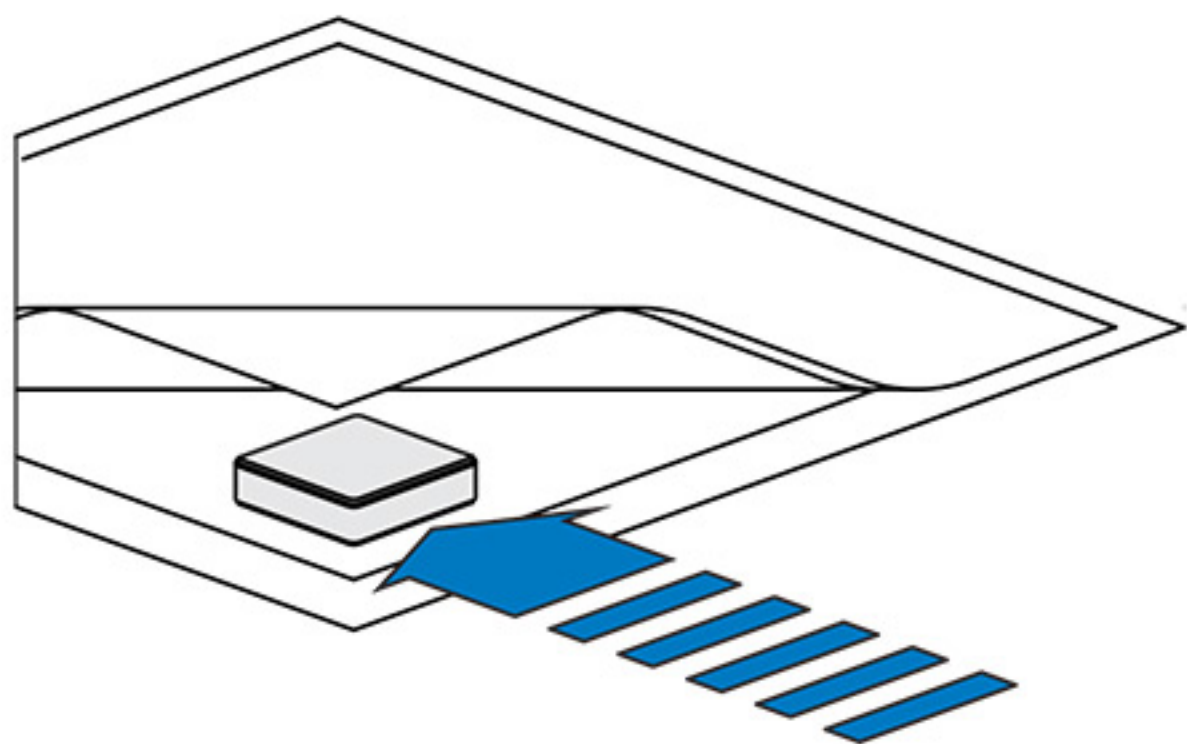


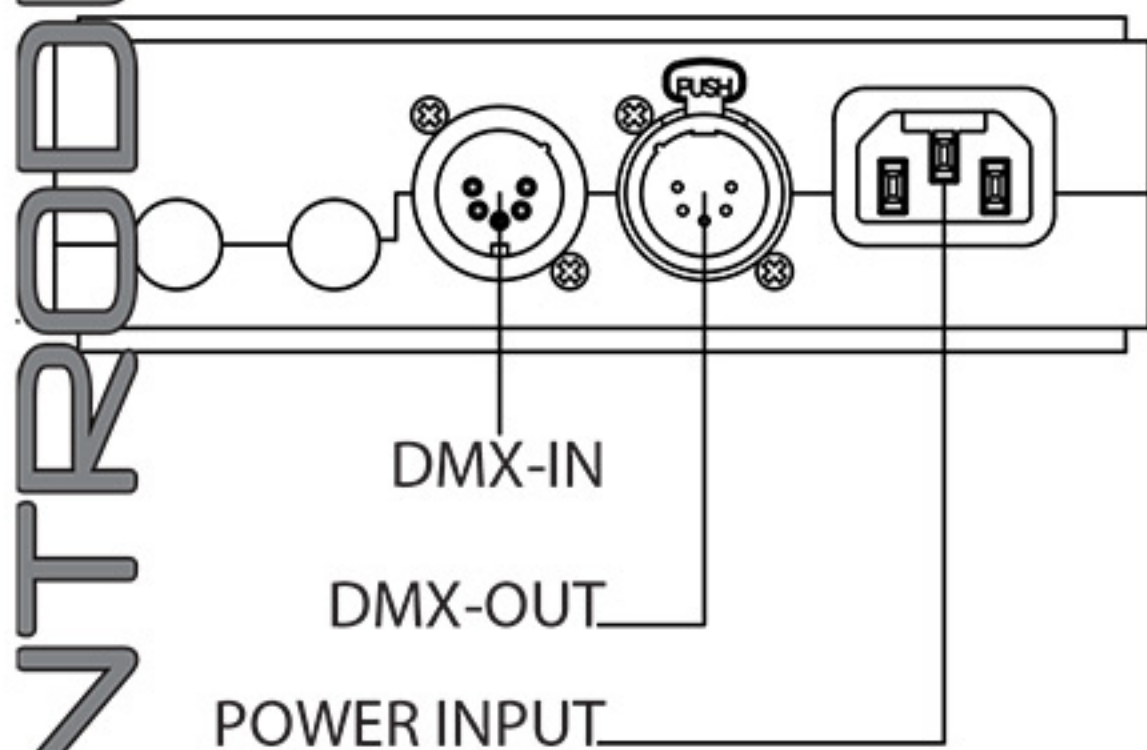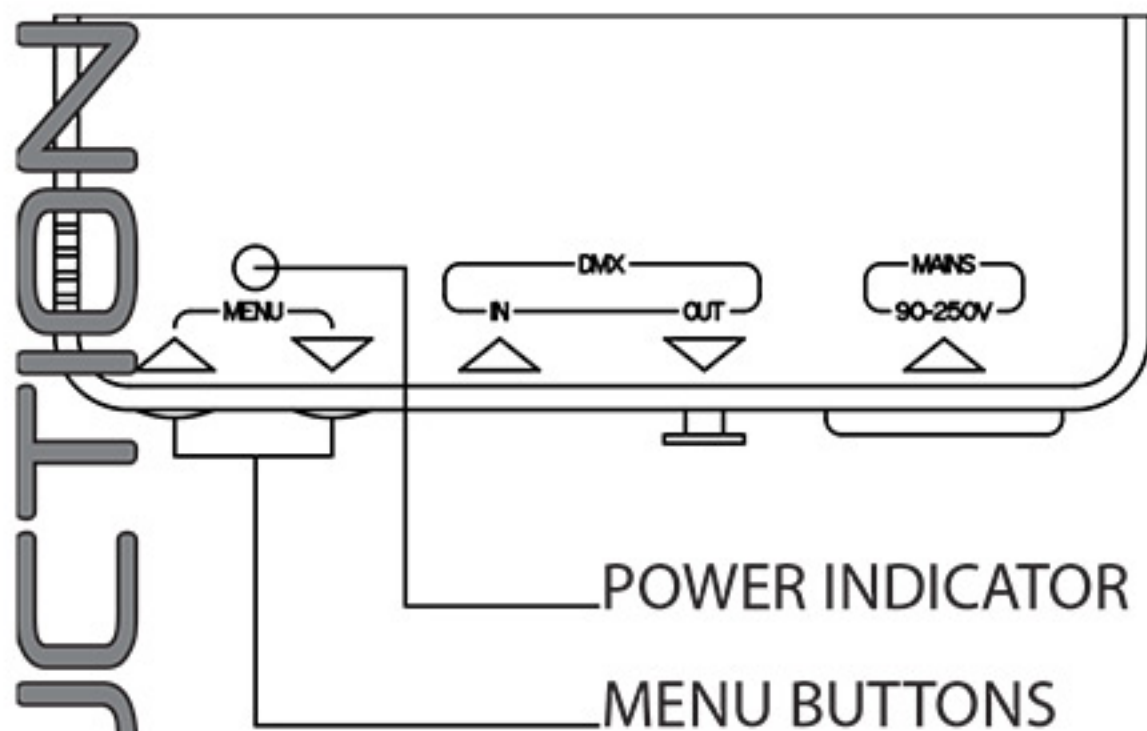

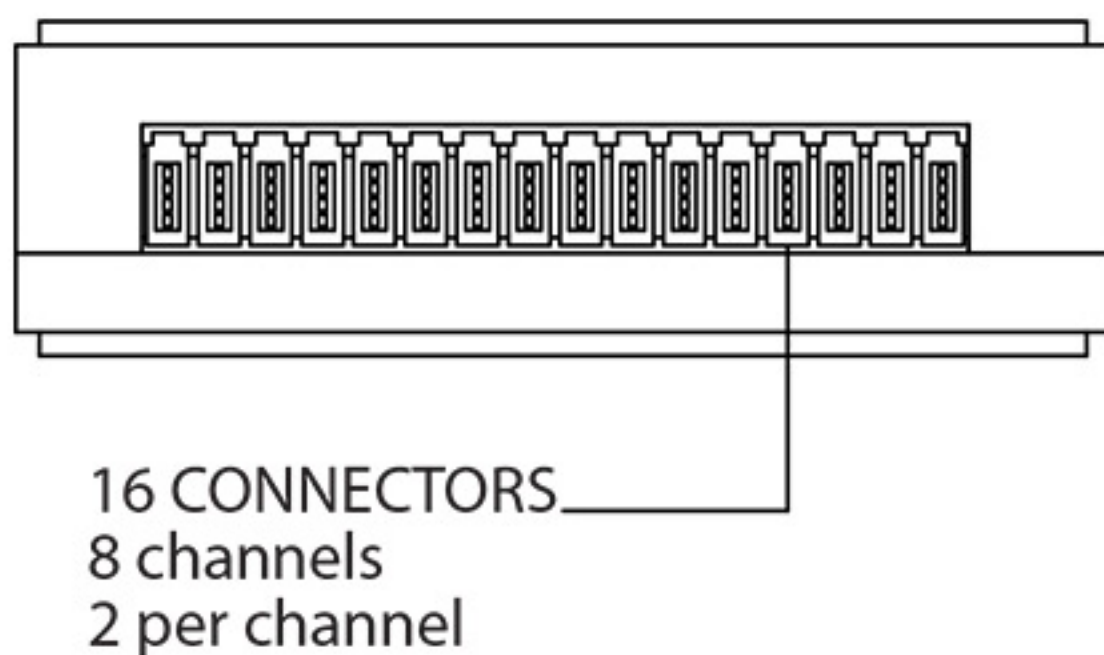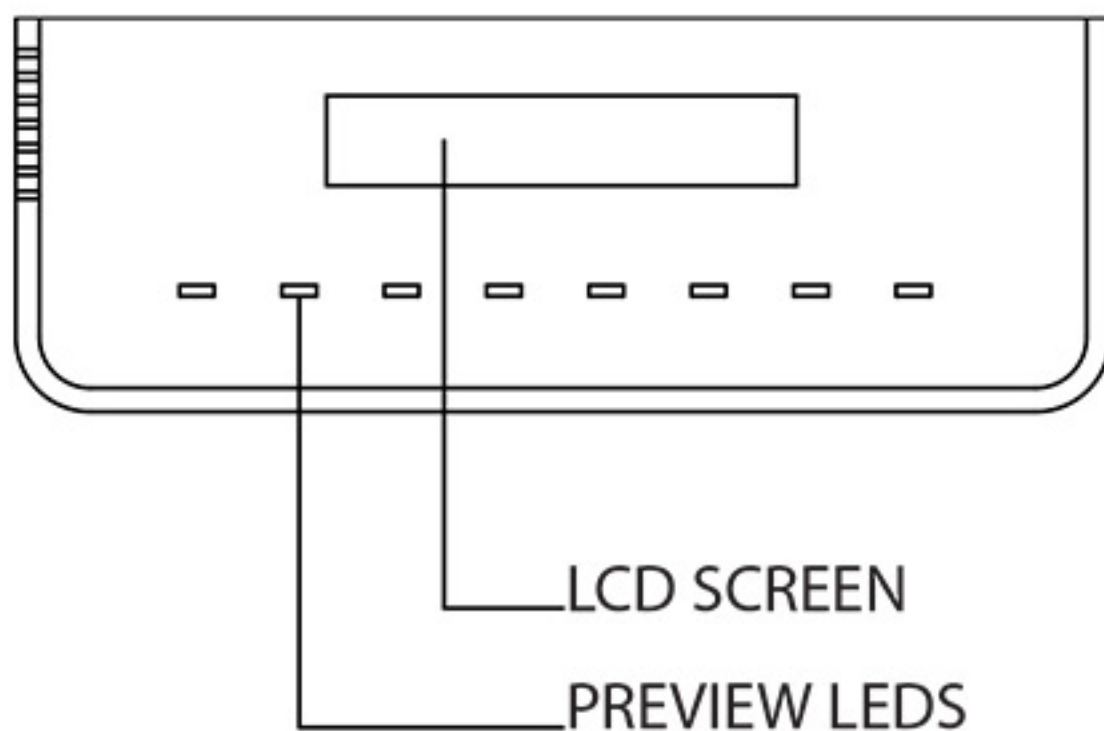


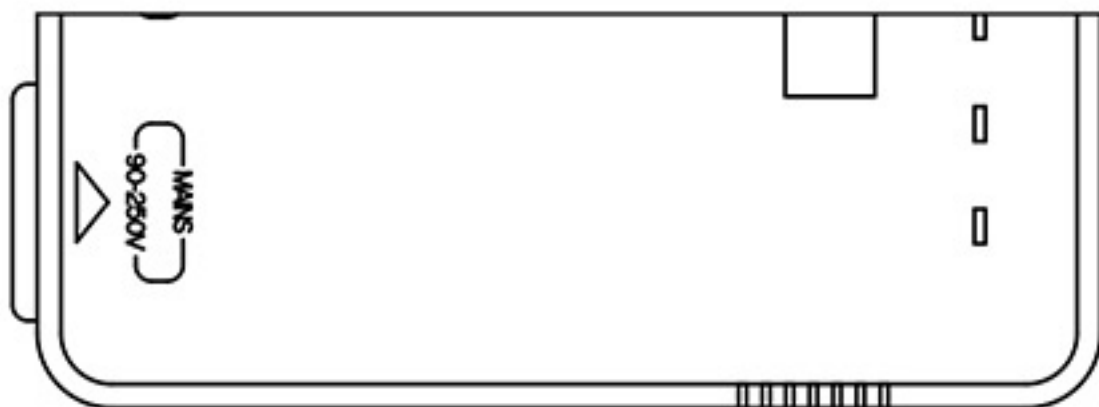


AIR VENTS
diagonal airflow
DO NOT COVER

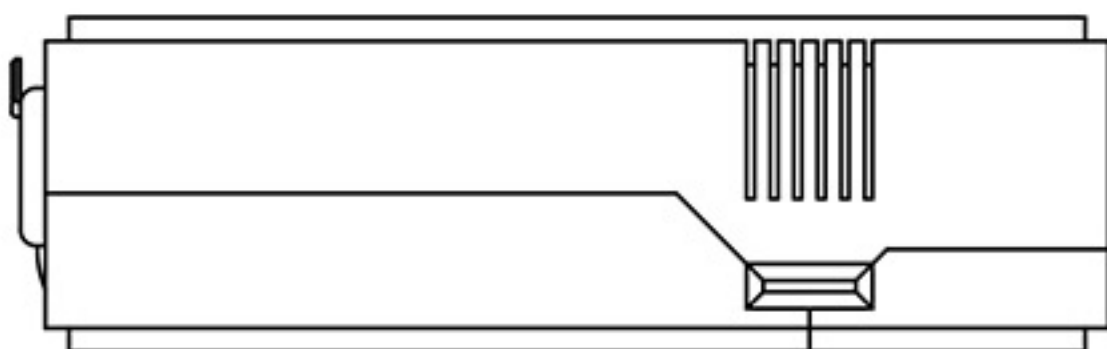

SD CARD SLOT
firmware updates

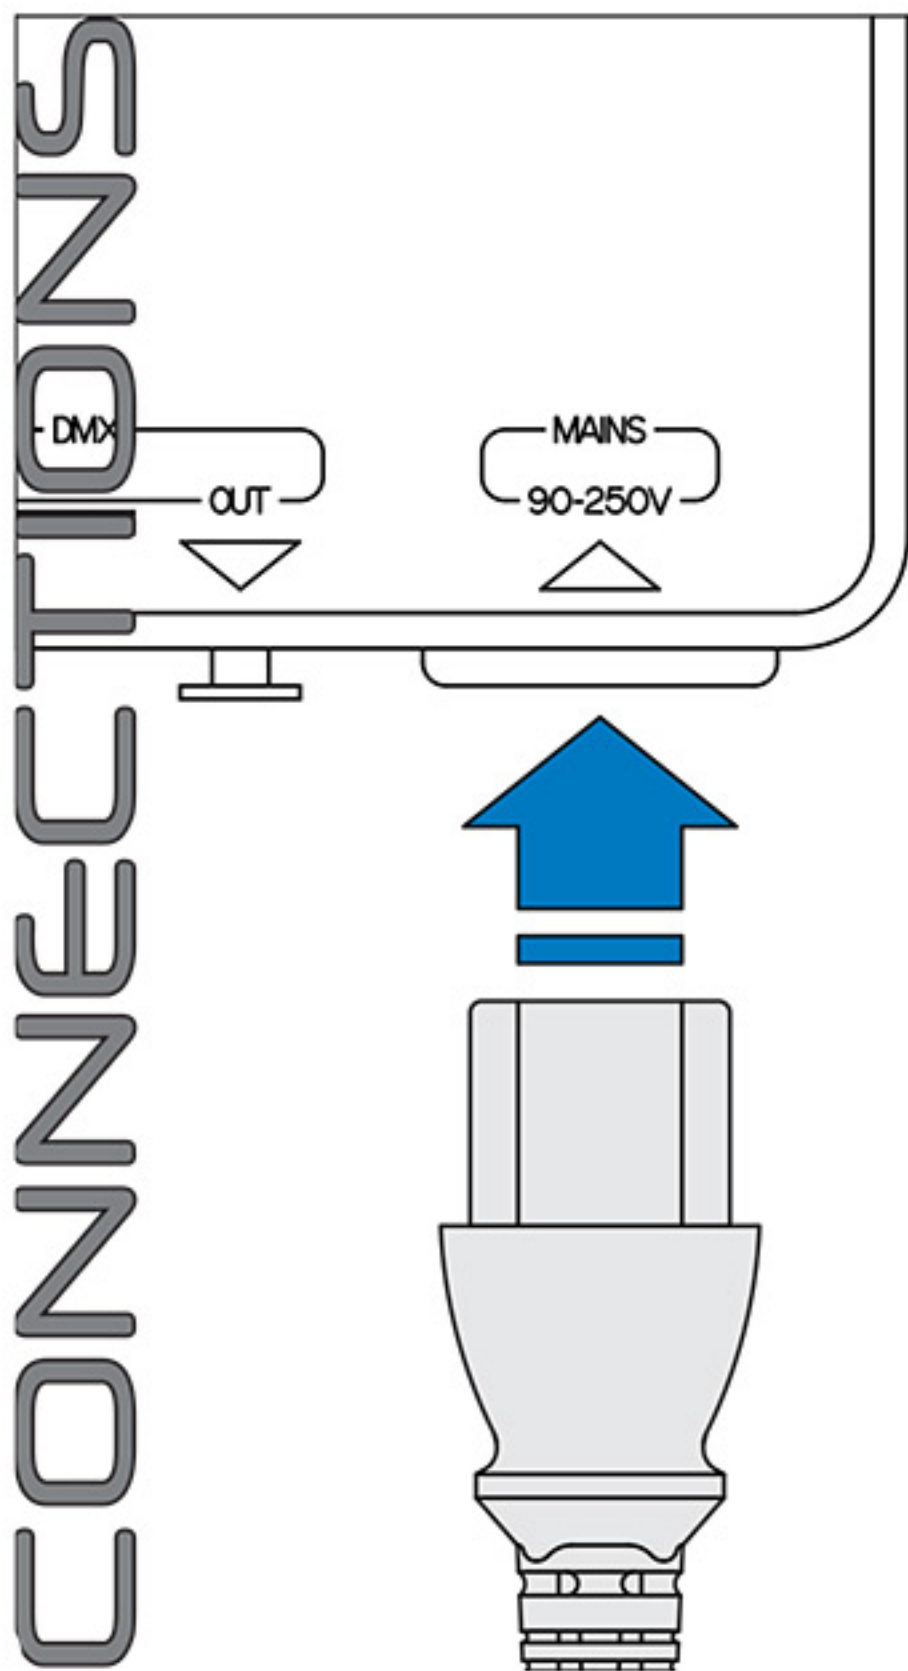

POWER INDICATOR-ON [✓]
WWW.SHOWLED.COM [✓]

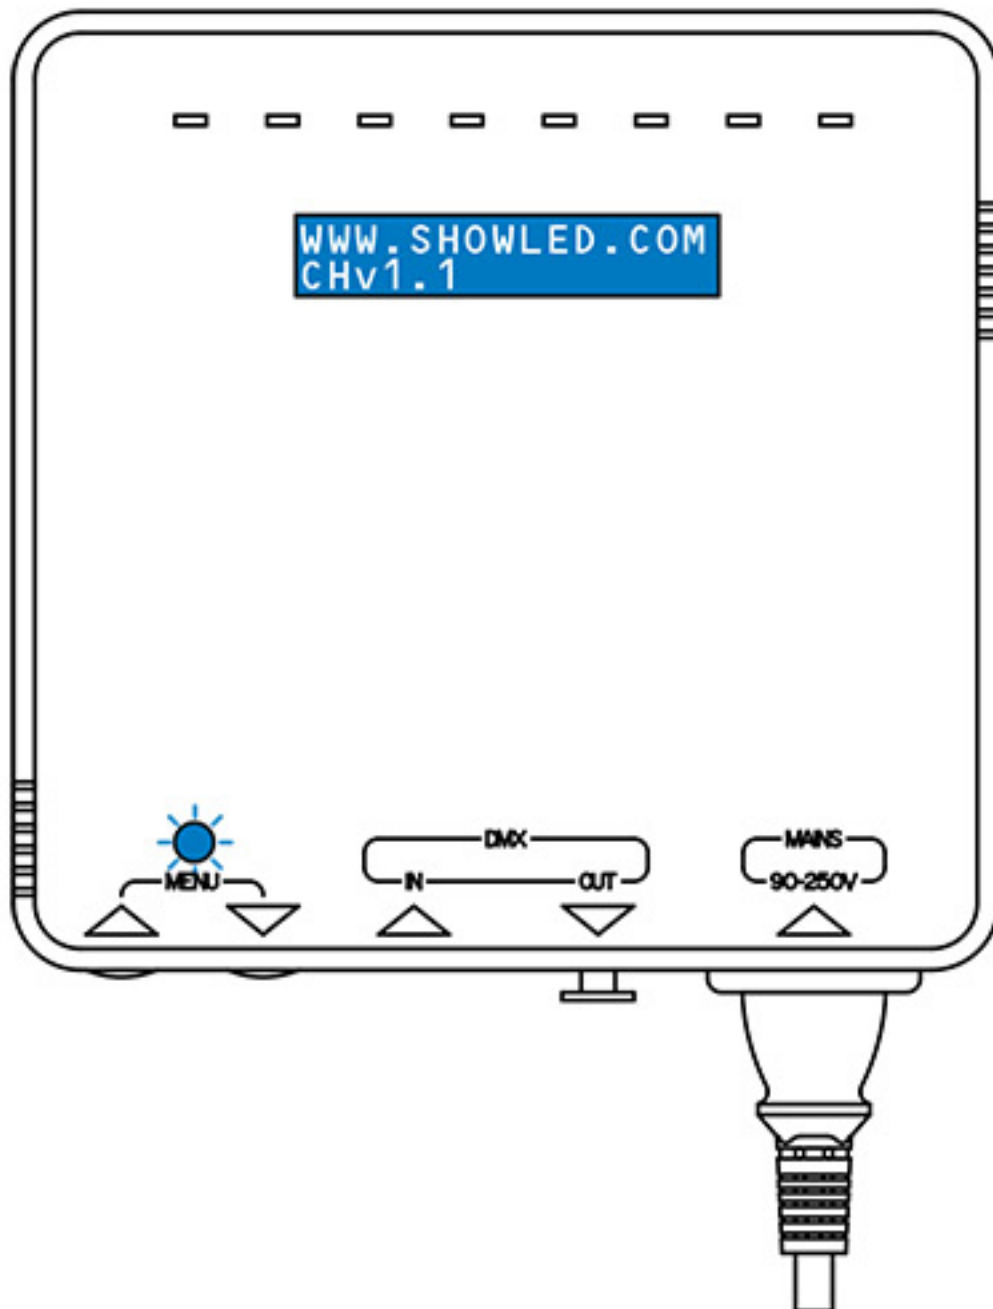

WWW.SHOWLED.COM
CHv1.1

PRESS
▲+▼

DEVICE FUNCTION
◊Select


CLASSIC OUTPUT
◊Select

OR


CHAMELEON OUTPUT
◊Select




CLASSIC
orange plug

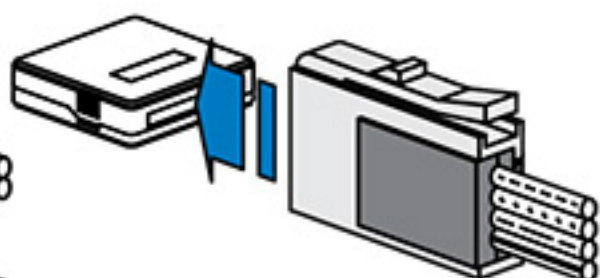

CHAMELEON
grey plug

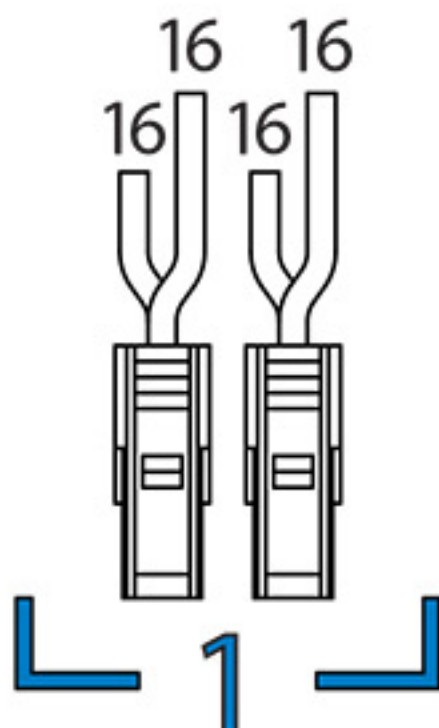

64 LEDS MAX
PER CHANNEL

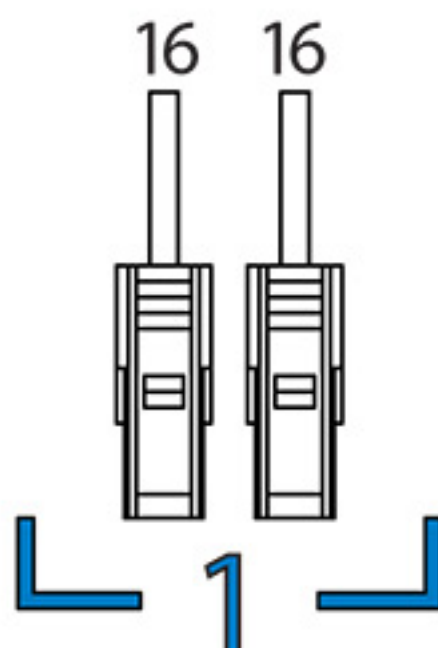


32 LEDS MAX
PER CHANNEL

└─1─┐└─2─┐└─3─┐└─4─┐└─1─┐└─2─┐└─3─┐└─4─┐



CLASSIC
on = blue


CHAMELEON
copies the RGB

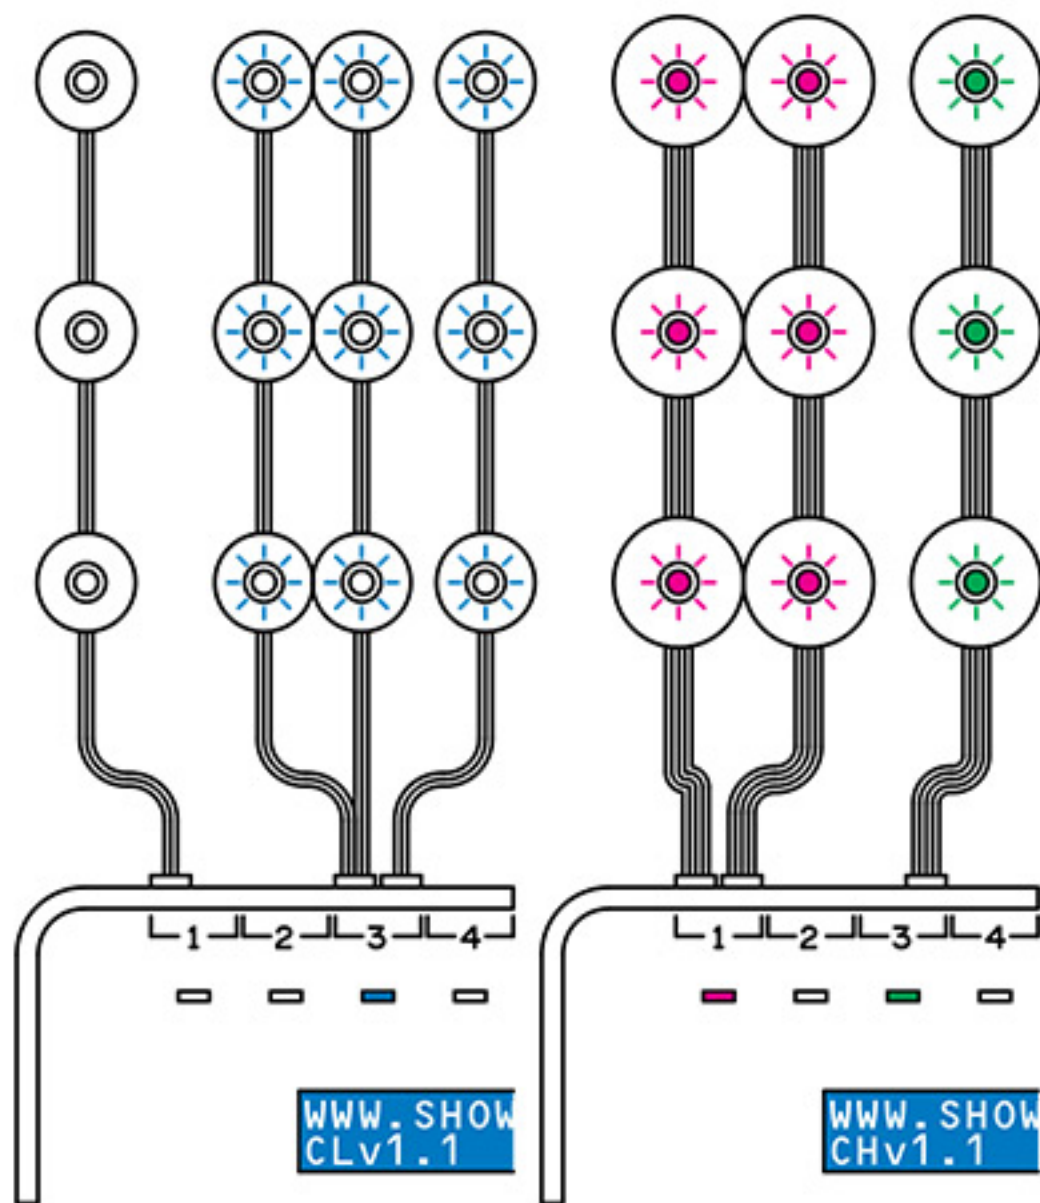

MASTER


SLAVE

SLAVE



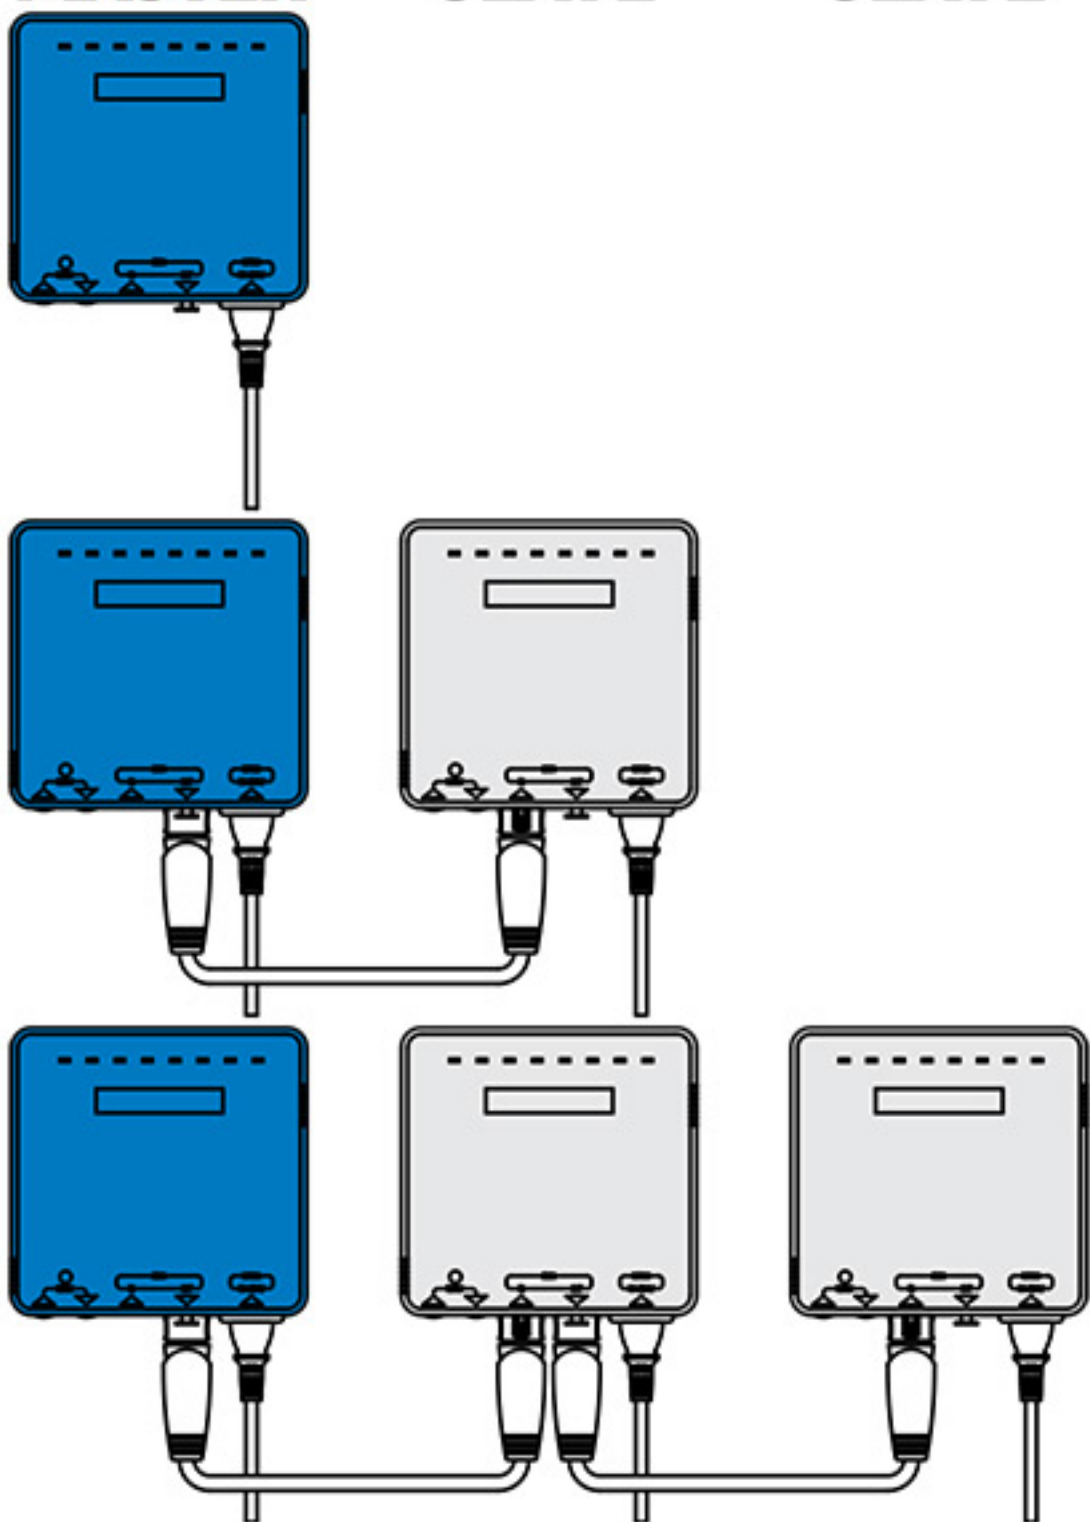


INTERCONNECTIVITY

PREVIOUS $\leftrightarrow$ CURRENT

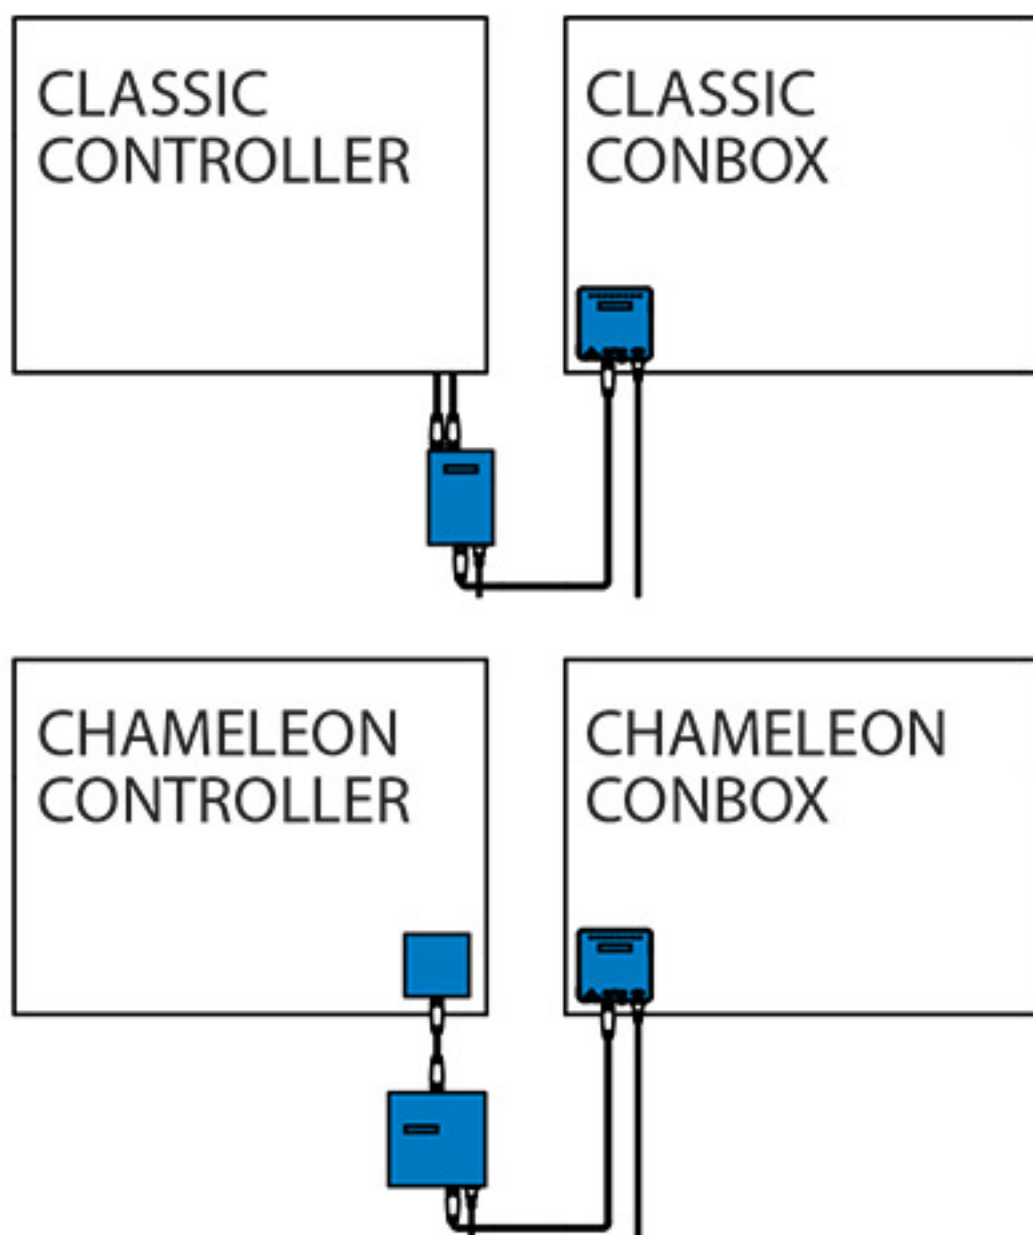

CONBOX SETTINGS

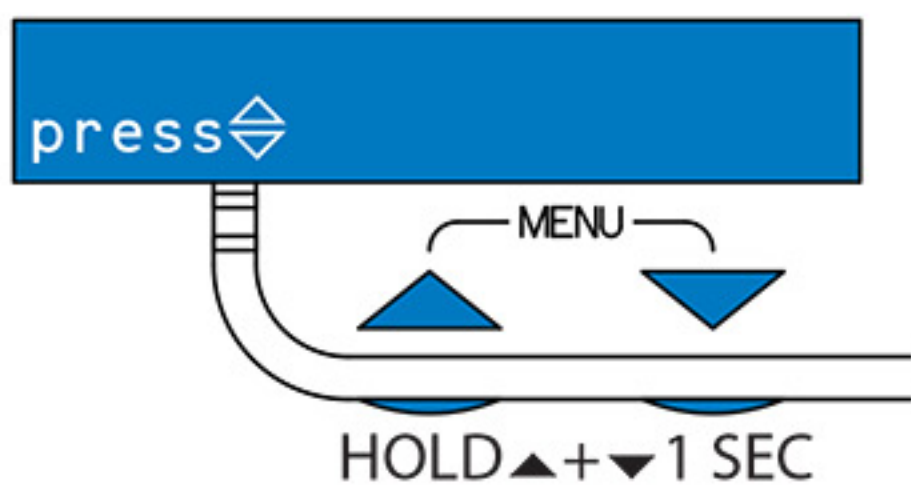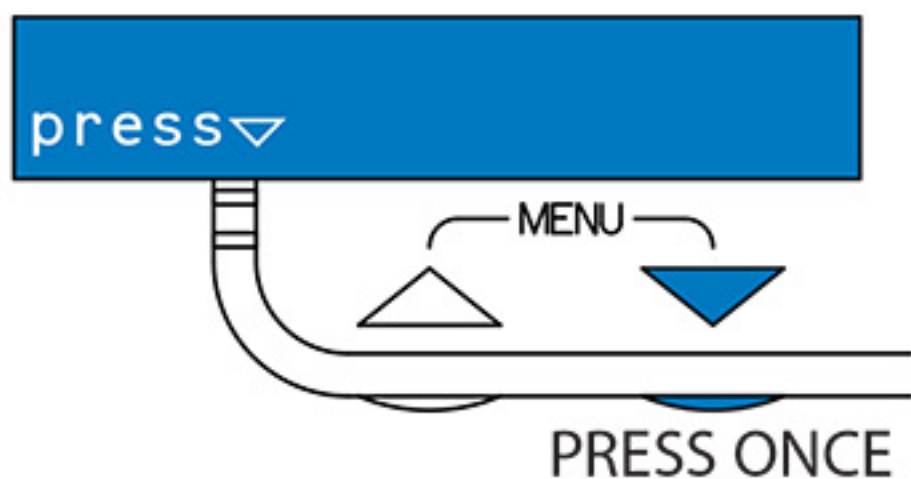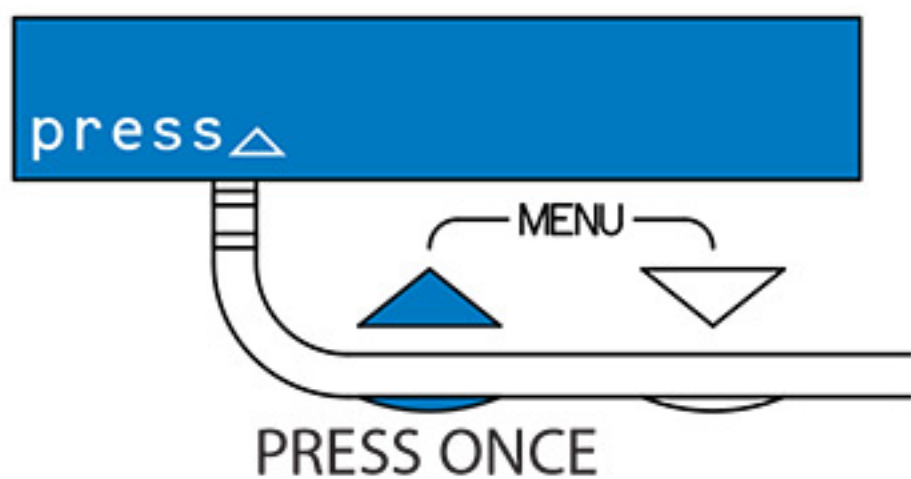

STAND ALONE MASTER FOR CLASSIC + CHAMELEON

EXIT
◀select

EXIT SETTINGS MENU

PATTERN TYPE
◀select

0 1 2 3 4 5 6 7 S 255

PATT.BEHAVIOUR
◀select

0 soft hard 255

CHASE SPEED
◀select

0  255

MIN. INTENSITY
◀select

0  255

MAX. INTENSITY
◀select

0  255

STAND ALONE MASTER FOR CHAMELEON ONLY

NUMBER OF COLOURS
◊select

0 1 2 3 4 4R 3R 2R CH 255

COLOUR 1
◊select

0  255

COLOUR 2
◊select

0  255


COLOUR 3
◊select

0  255

COLOUR 4
◊select

0  255

NOTE: DMX channel arrangement for 10/5 & 10/5SYNC is the same as this parameter description.

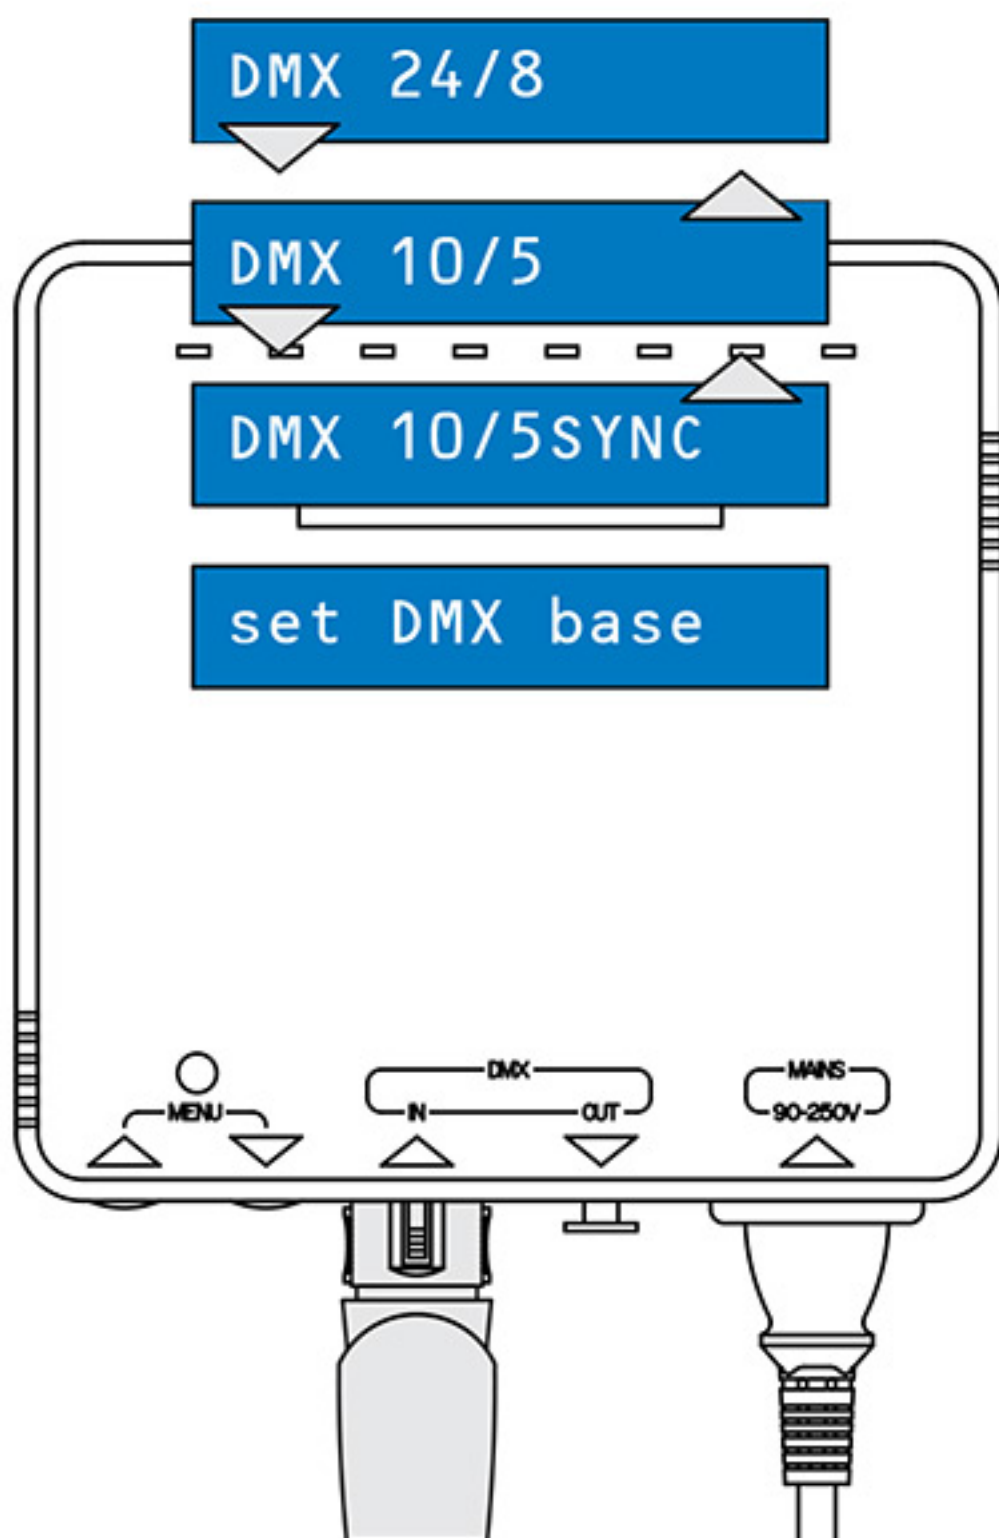

DMX 24/8
◊select

required DMX channels
24 for chameleon / 8 for classic

DMX 10/5
◊select

required DMX channels
10 for chameleon / 5 for classic


DMX 10/5SYNC
◊select

same as above but 'sync' helps to
synchronise all your controllers

set DMX base
◊select

set DMX base address

RETURN TO FACTORY SETTINGS

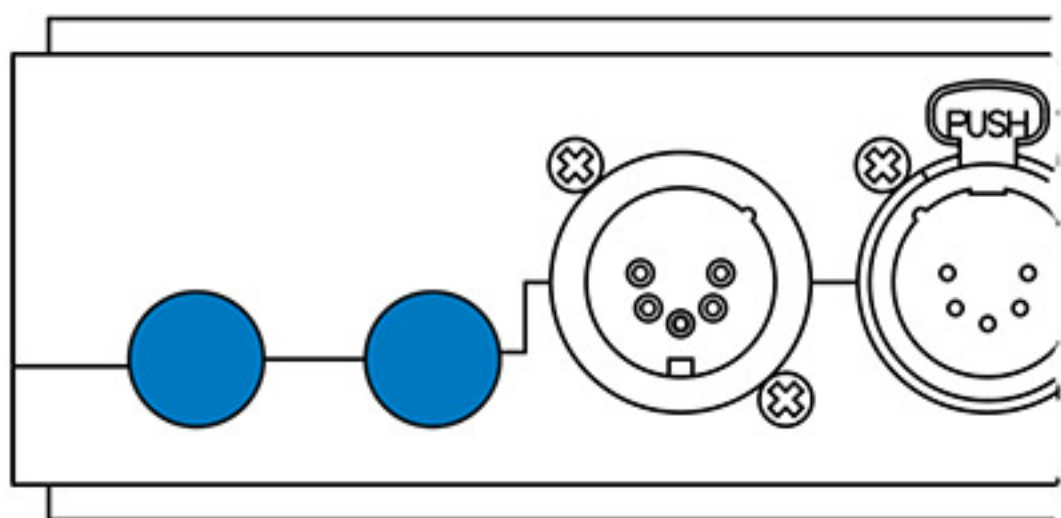


PRESS



4 SEC

FIRMWARE UPDATE

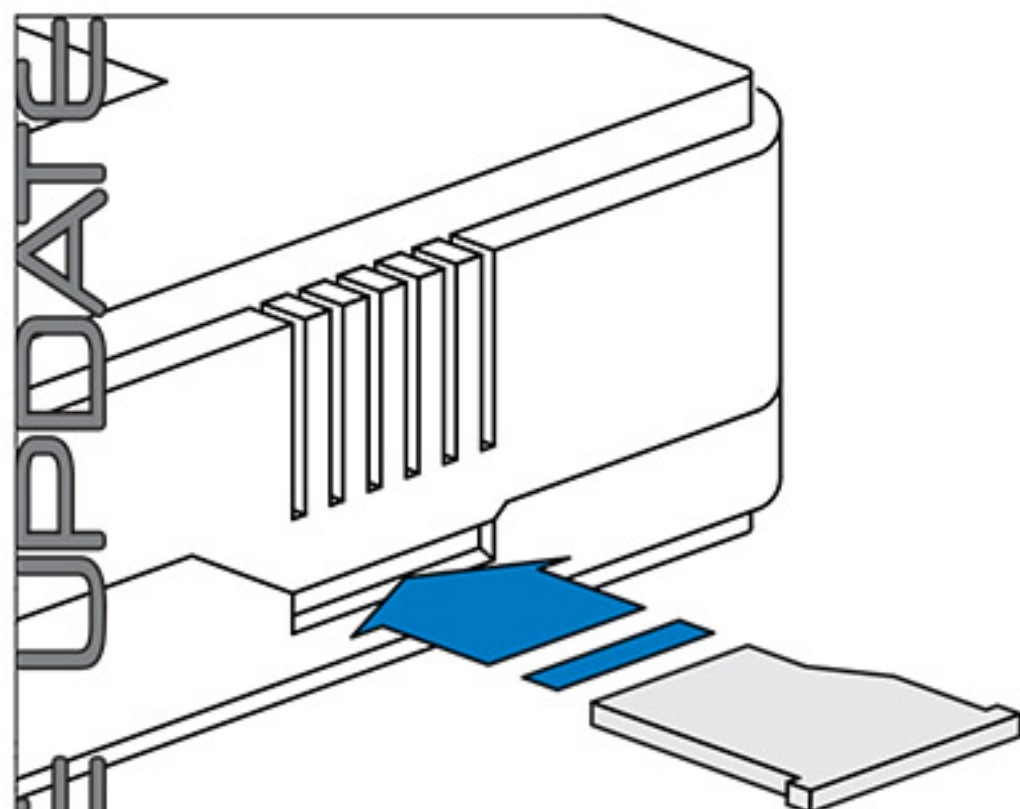

CLASSIC OUTPUT
Select

CHAMELEON OUTPUT
Select

WWW.SHOWLED.COM
CLv1.1

WWW.SHOWLED.COM
CHv1.1

MicroSD detected
Update firmware

updating to v1.2
DO NOT TURN OFF

WWW.SHOWLED.COM
CLv1.2

WWW.SHOWLED.COM
CHv1.2



Sold by:



ROSE BRAND

NJ 800-223-1624

CA 800-360-5056

www.RoseBrand.com