


Flat Mount Sheave Blocks

Item No.	Max Cable Dia.	Α	В	С	D	Е	F	G	Н	K	L	Υ	WLL*	Weight Per
HWSHEA3/16FLATSINGLE	3/16"	1-1/2"	2"	7/16"	2"	1-7/16"	11/16"	2-1/8"	2-3/8"	1-1/8"	1-1/2"	N/A	600 LBS.	.5 LB.
HWSHEA1/4FLATSINGLE	1/4"	2-1/2"	3"	7/16"	2"	1-7/16"	11/16"	3-1/8"	3-9/16"	1-1/8"	1-3/4"	N/A	800 LBS.	1 LBS.
HWSHEA3/16FLATDOUBLE	3/16"	1-1/2"	2"	7/16"	2-9/16"	2"	11/16"	2-1/8"	2-3/8"	1-1/8"	1-1/2"	1-7/32"	600 LBS.	1 LBS.
HWSHEA1/4FLATDOUBLE	1/4"	2-1/2"	3"	7/16"	2-9/16"	2"	11/16"	3-1/8"	3-9/16"	1-1/8"	1-3/4"	1-7/32"	800 LBS.	2.5 LBS.

Dimensions are approximate

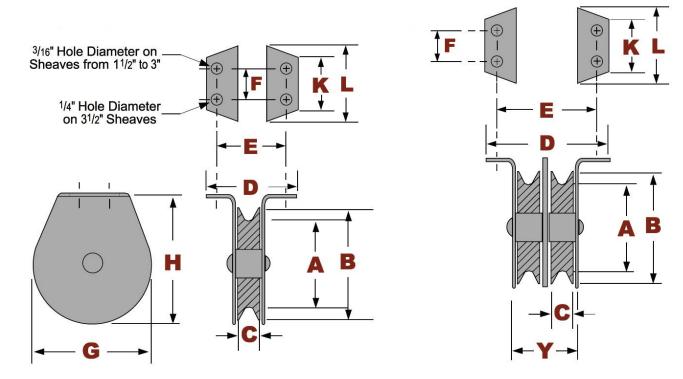

*WLL=Working Load Limit [Based on a minimum 3:1 Design Factor]

This information is provided for reference only. While Rose Brand believes the information to be accurate, it is subject to change without notice and is not guaranteed. Please contact Rose Brand at 1-800-223-1624 with questions or concerns